


Kit Inclusions


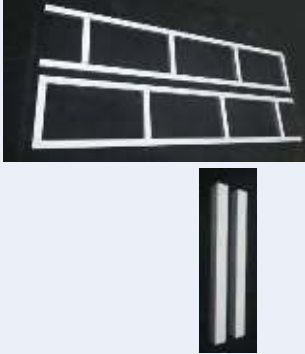




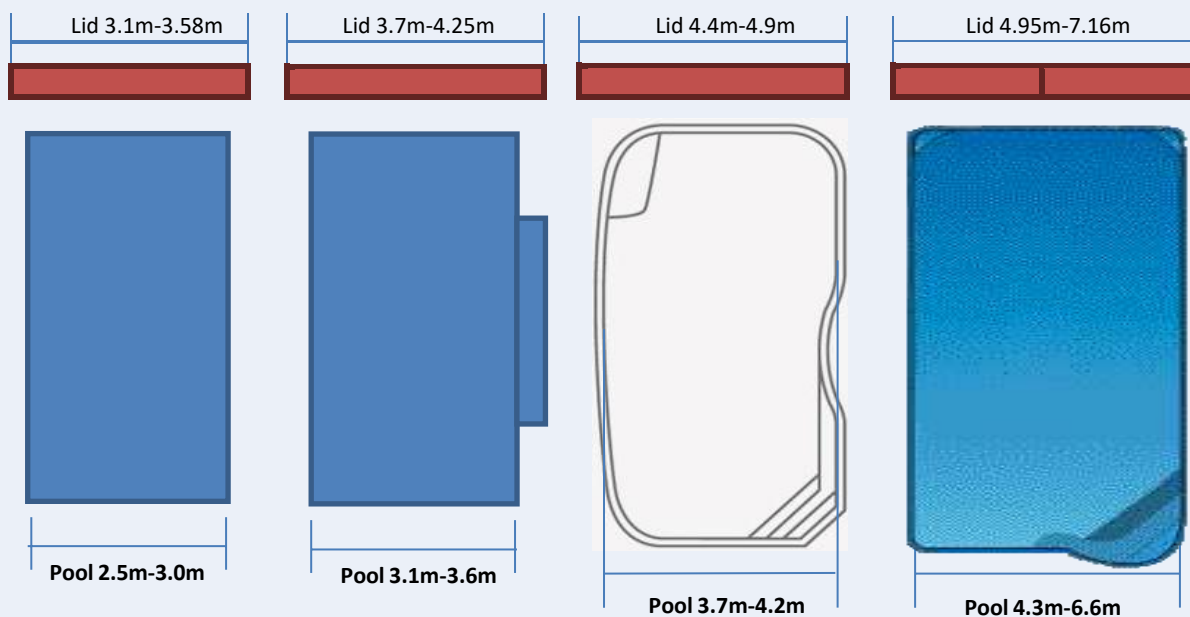

Kit Name	Approx Waterline		Adjustable lid size	
	Pool Min	Pool Max	Lid Min	Lid Max
Petite	1.50	1.80	2.30	2.50*
Narrow	1.85	2.30	2.73	3.05*
Small	2.40	2.90	3.10	3.58*
Medium	3.00	3.60	3.70	4.25*
Large	3.70	4.10	4.40	4.80
LargePlus	4.20	4.20	4.40	4.90
Super (2 lids)	4.30	4.80	4.95	5.50**
SuperPlus (2 lids)	4.80	5.40	5.46	6.10**
SuperMax (2 lids)	5.50	6.00	6.20	7.16**
Custom (2 lids)	6.10	6.60	6.20	7.16**

*Extended joiners increase Length up to 120mm or ** up to 240mm



There is no 'box' that drops or concretes into the ground. The installation cavity is created in a decking structure, concrete pit or using our framing bracket system and treated pine for sand/soil installations (all specifications are supplied).

Concrete Kit inclusions – Manual Winding


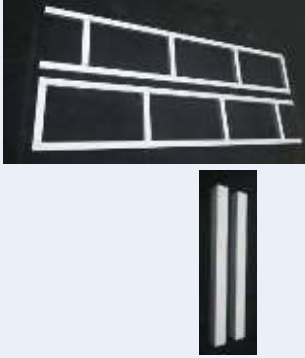





			
Gearbox Assembly	Lid frame with attached stainless-steel hinges	Gearbox assembly & End Mount	Hinge & Handle plates
			
Gas strut(s) & Stainless-Steel Brackets	Stainless-Steel Flush Pull Handle	Roller tube & 2 end slugs	Winding handle

Instructions and Diagrams

<p>Concrete Kit Fixing Hardware & Installation Instructions Gas Strut setup</p>	<p>Diagram – Deck or pit set out (top view) Diagram – n/a Diagram – Lid frame and strut mounting Diagram – Gearbox and End Mount brackets</p>
--	---



Under Deck Kit inclusions – Manual Winding


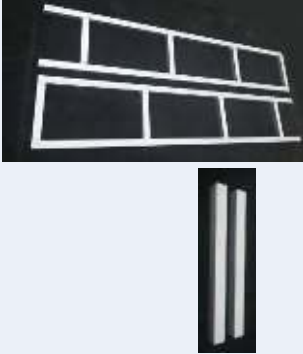






			
Gearbox Assembly	Lid frame with attached stainless-steel hinges	Gearbox assembly & End Mount	
			
Gas strut(s) & Stainless-Steel Brackets	Stainless-Steel Flush Pull Handle	Roller tube & 2 end slugs	Winding handle

Instructions and Diagrams

Under-Deck Kit or Concrete Sit Fixing Hardware & Installation Instructions Gas Strut setup	Diagram – Deck or pit set out (top view) Diagram – Lid frame and strut mounting Diagram – Gearbox and End Mount brackets
---	--



Sand/Soil In-Ground Kit inclusions – Manual Winding





			
Framing Brackets (In-Ground kits only)	Lid frame with attached stainless-steel hinges	Gearbox assembly & End Mount	Handle plates (file finish only)
			
Gas strut(s) & Stainless- Steel Brackets	Stainless-Steel Flush Pull Handle	Roller tube & 2 end slugs	Winding handle

Instructions and Diagrams

In-Ground kit Fixing Hardware & Installation Instructions Gas Strut setup	Diagram – Excavation/Dig plan (top view) Diagram – Excavation/Dig plan (side view) Diagram – Lid frame and strut mounting Diagram – Gearbox and End Mount brackets
--	---



Mechanism Only Kit inclusions – Manual Winding




			
Gearbox Assembly	Winding handle	Gearbox assembly & End Mount	Roller tube & 2 end slugs

Instructions and Diagrams

Under-Deck Kit or Concrete Sit Fixing Hardware & Installation Instructions	Diagram – Gearbox and End Mount brackets
--	--

Powered 21 Options Available

Semi remote control

		
Power / Gearbox 2 x remotes & AC Charger 5m of cable included	Handwheel	Upgrade for Manual gearbox
<p>Low wattage 24v system - Standard external power point required The Power 21 replaces the manual gearbox in the kits</p>		

See the Power 21 in action